


**Remove the Front Gate as shown.**

**Step 1:** Using a Hex Tool, loosen the screw shown as (1) and separate the headboard from the stabilizer bar about 1/4" (only on one side). **Do not remove the screw.**


**Step 2:** Detach the bottom of the front gate by slipping the metal guide pin out of the plastic track on both sides.

**Step 3:** Now remove the gate by dis-engaging the plastic bushings from the grooves in the sides of the front gate.

1  
2

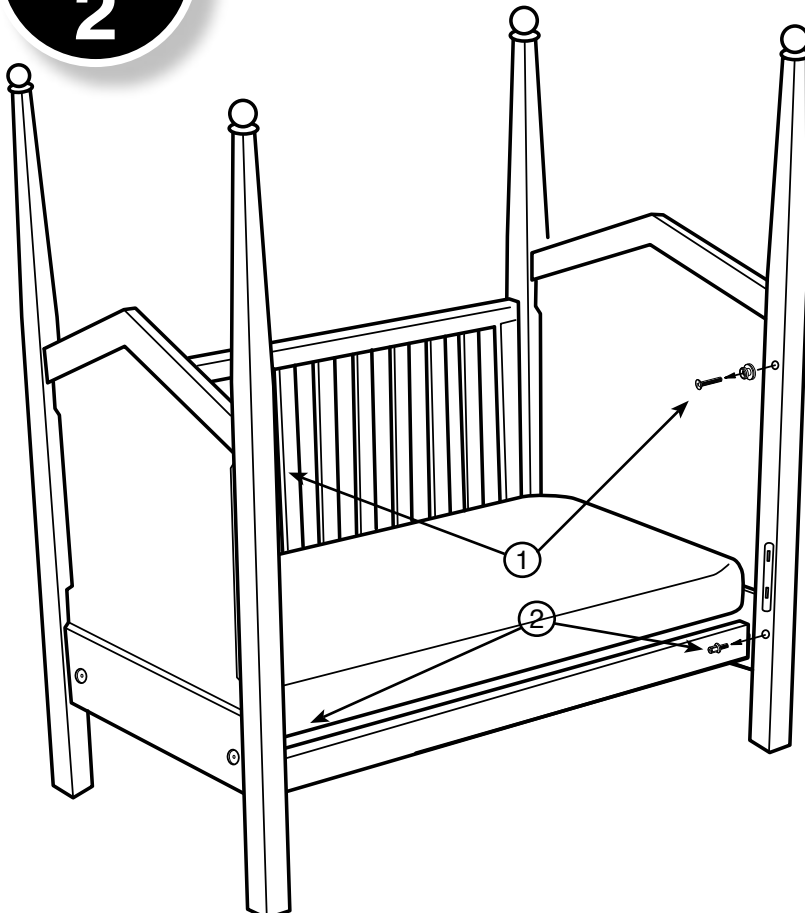

Remove the plastic bushings (1) and the metal guide pins (2) using a Phillips head screwdriver. Keep the parts in a safe place, as you will need them if you wish to use it as a crib again.

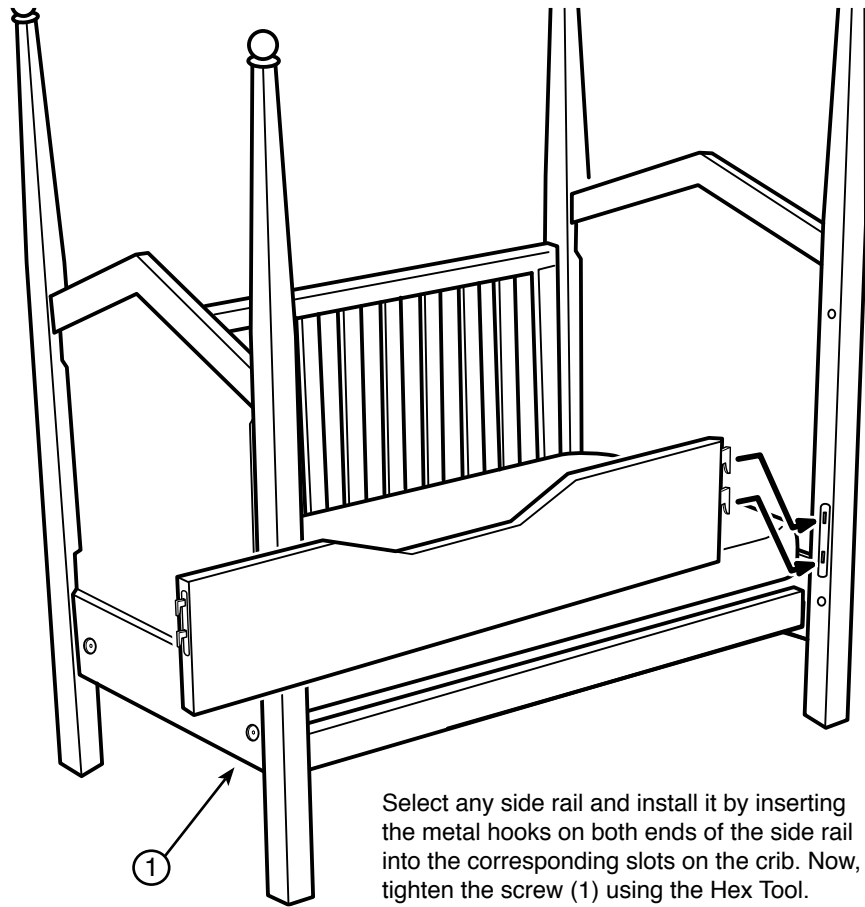


Select any side rail and install it by inserting the metal hooks on both ends of the side rail into the corresponding slots on the crib. Now, tighten the screw (1) using the Hex Tool.

3  
4




Turn the crib around. Using the Hex Tool, loosen the screw (1) on the side of the crib but **do not remove the screw**. Now remove the screws (2) as shown. Remove the back piece (3) and retain all parts for future use.

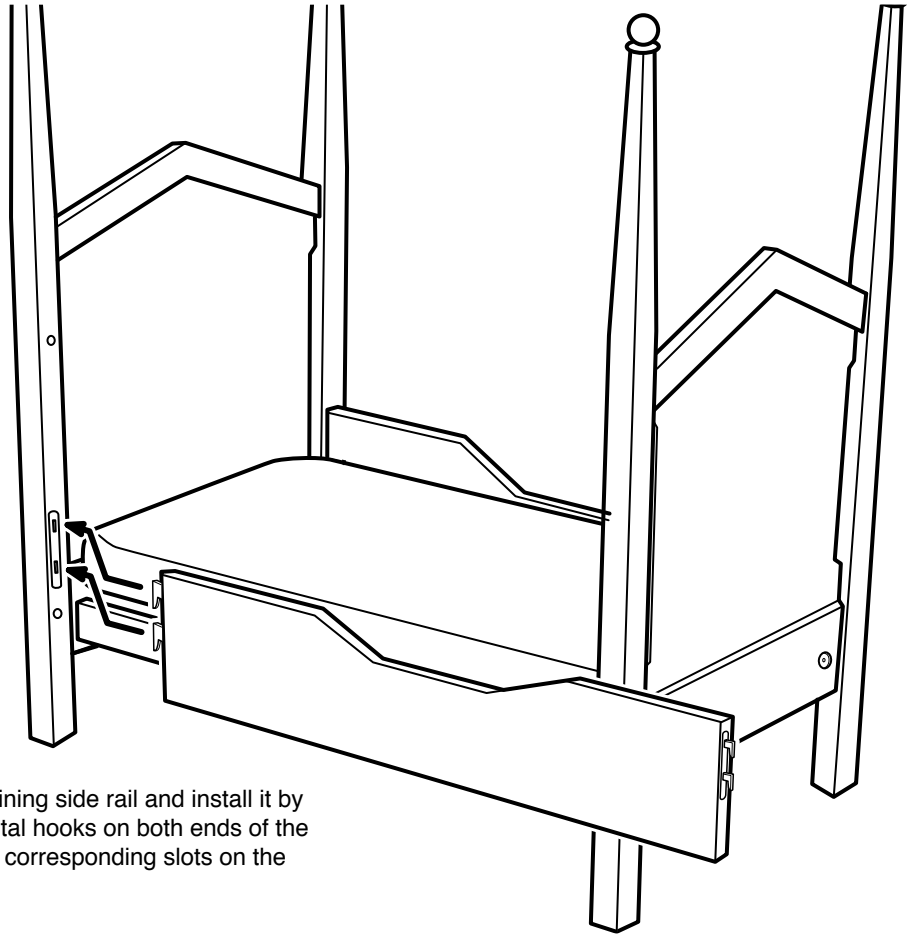

Select the remaining side rail and install it by inserting the metal hooks on both ends of the side rail into the corresponding slots on the crib.

5  
6

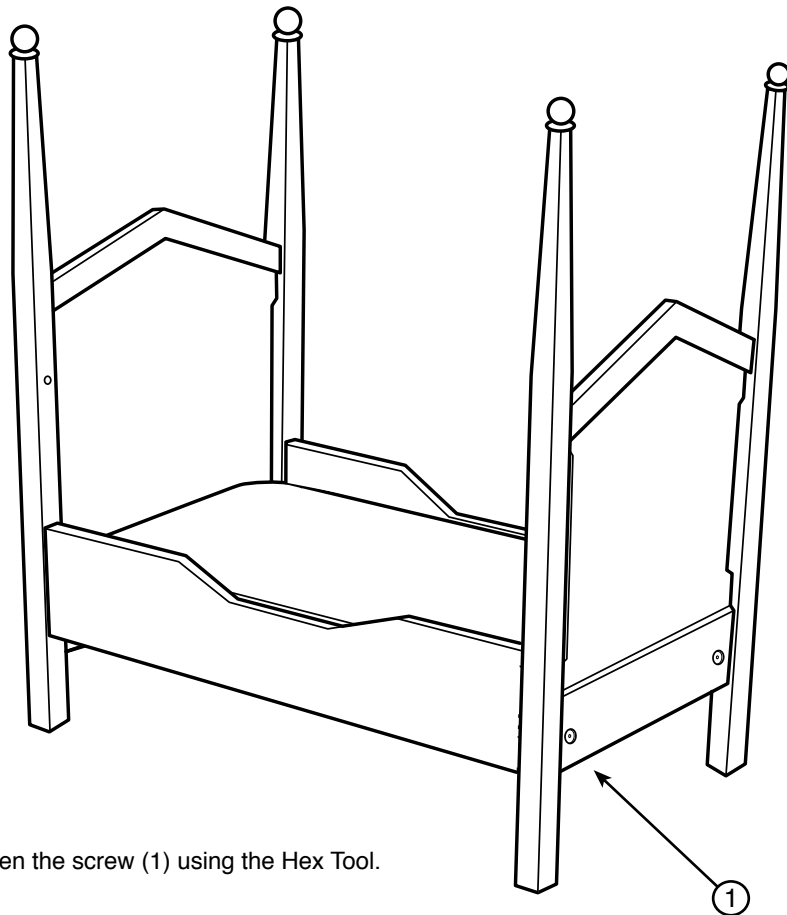

Tighten the screw (1) using the Hex Tool.